

По вопросам продаж и поддержки обращайтесь:

Астрахань +7 (851) 299-46-80
Барнаул +7 (385) 237-96-76
Белгород +7 (472) 220-58-80
Владимир +7 (492) 249-51-33
Волгоград +7 (844) 245-94-42
Екатеринбург +7 (343) 302-14-75
Ижевск +7 (341) 220-90-75
Казань +7 (843) 207-19-05
Калининград +7 (401) 272-21-36
Кемерово +7 (384) 221-56-70
Киров +7 (833) 220-58-70
Краснодар +7 (861) 238-86-59
Красноярск +7 (391) 989-82-67



Курск +7 (471) 223-80-45
Липецк +7 (474) 220-01-75
Москва +7 (499) 404-24-72
Набережные Челны +7 (855) 291-01-32
Нижний Новгород +7 (831) 200-34-65
Новосибирск +7 (383) 235-95-48
Омск +7 (381) 299-16-70
Оренбург +7 (353) 248-64-35
Пермь +7 (342) 233-81-65
Ростов-на-Дону +7 (863) 309-14-65
Рязань +7 (491) 277-61-95
Самара +7 (846) 219-28-25
Санкт-Петербург +7 (812) 660-57-09

Саратов +7 (845) 239-86-35
Смоленск +7 (481) 251-55-32
Ставрополь +7 (865) 257-76-63
Сургут +7 (346) 277-96-35
Тверь +7 (482) 239-50-56
Тула +7 (487) 244-05-30
Тюмень +7 (345) 256-94-75
Ульяновск +7 (842) 242-51-95
Уфа +7 (347) 258-82-65
Хабаровск +7 (421) 292-95-69
Чебоксары +7 (835) 228-50-89
Челябинск +7 (351) 277-89-65
Ярославль +7 (485) 267-02-35

сайт: hylok.pro-solution.ru | эл. почта: hky@pro-solution.ru

телефон: 8 800 511 88 70

Россия и другие страны ТС доставка в любой город

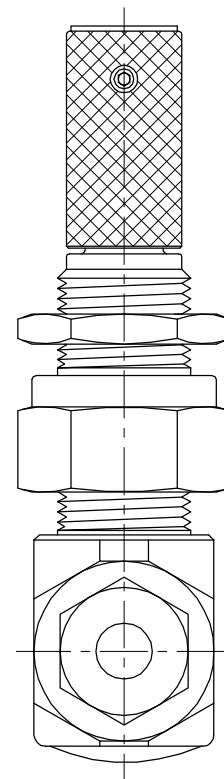
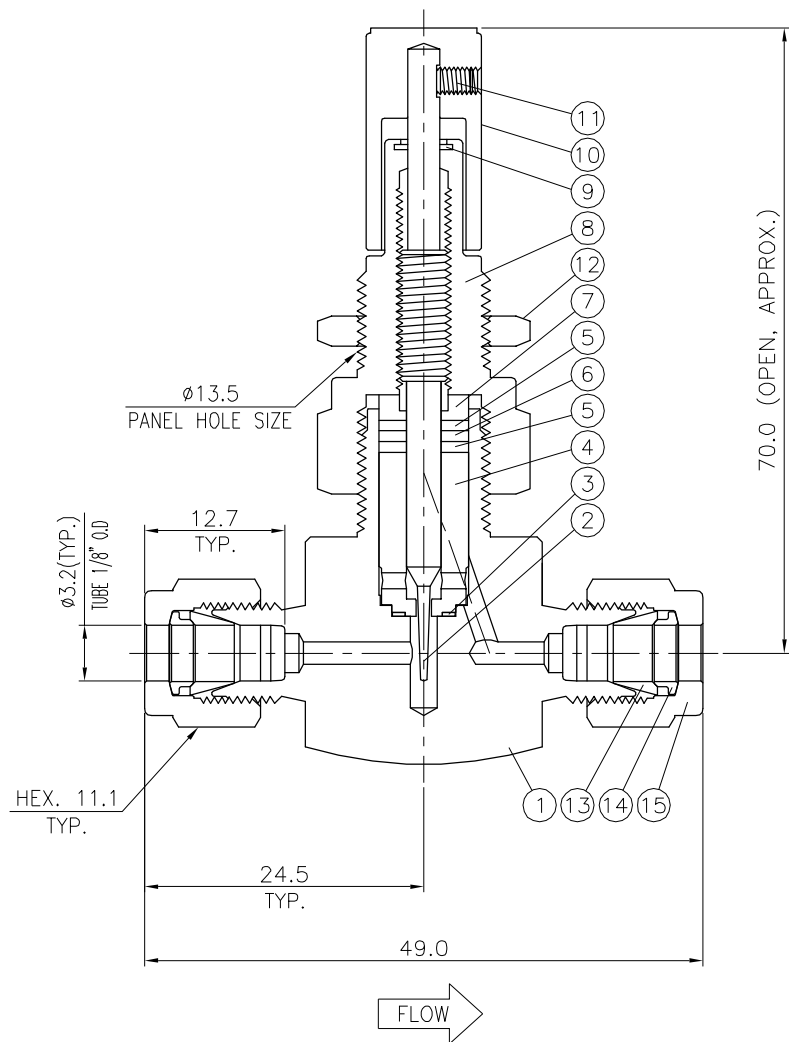


NO.	DESCRIPTION	MATERIAL	REMARKS
1	BODY	316SS	
2	METERING STEM	316SS	
3	ORIFICE SEAL	PTFE	
4	INTEGRATED SEAL	316SS	
5	PACKING	PTFE	
6	LOWER SPACER	316SS	
7	UPPER SPACER	316SS	
8	BONNET	316SS	
9	WASHER	PTFE	
10	HANDLE	316SS	
11	SET SCREW	316SS	
12	LOCKING NUT	316SS	
13	FRONT FERRULE	316SS	
14	BACK FERRULE	316SS	
15	NUT	316SS	

NOTE.

- PART NO. : VMT1H-2T-1D
- MATERIAL : 316SS
- SIZE : 1/8"
- PRESSURE RATING : 5,000psig @ 21°C
- TEMPERATURE RANGE : -54°C ~ 232°C
- ORIFICE SIZE : 1.2mm
- CV FACTOR : 0.010 Cv (1" STEM)
- PANEL THICKNESS : Max. 4mm
- UNIT : mm

0	11.JAN.2018	ISSUED FOR APPROVAL	H.S.JEON	J.K.PARK	W.C.KIM
REV.	DATE	DESCRIPTION	PREPARED BY	REVIEWED BY	APPROVED BY
Hy-Lok HY-LOK CORPORATION					
TITLE METERING VLAVE 1/8", 5,000psig, 0.010 Cv					
		VMT1H-2T-1D	0	N/S	1
PROJECT NO.	DWG NO.	REV.	STATUS	SCALE	PAGE

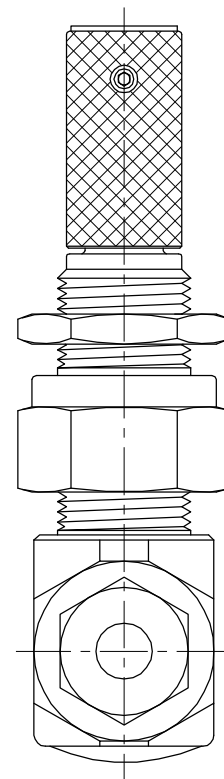
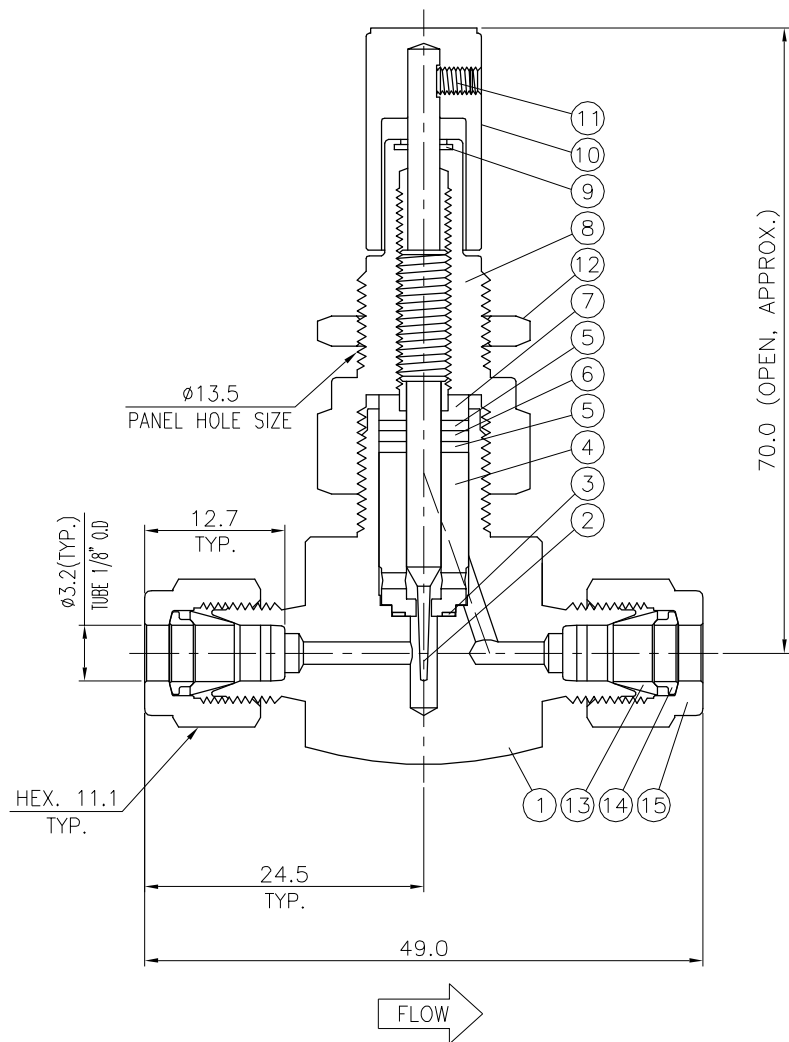


NO.	DESCRIPTION	MATERIAL	REMARKS
1	BODY	316SS	
2	METERING STEM	316SS	
3	ORIFICE SEAL	PTFE	
4	INTEGRATED SEAL	316SS	
5	PACKING	PTFE	
6	LOWER SPACER	316SS	
7	UPPER SPACER	316SS	
8	BONNET	316SS	
9	WASHER	PTFE	
10	HANDLE	316SS	
11	SET SCREW	316SS	
12	LOCKING NUT	316SS	
13	FRONT FERRULE	316SS	
14	BACK FERRULE	316SS	
15	NUT	316SS	

NOTE.

- PART NO. : VMT1H-2T-3D
- MATERIAL : 316SS
- SIZE : 1/8"
- PRESSURE RATING : 5,000psig @ 21°C
- TEMPERATURE RANGE : -54°C ~ 232°C
- ORIFICE SIZE : 1.2mm
- CV FACTOR : 0.024 Cv (1" STEM)
- PANEL THICKNESS : Max. 4mm
- UNIT : mm

0	11.JAN.2018	ISSUED FOR APPROVAL	H.S.JEON	J.K.PARK	W.C.KIM
REV.	DATE	DESCRIPTION	PREPARED BY	REVIEWED BY	APPROVED BY
Hy-Lok HY-LOK CORPORATION					
TITLE METERING VLAVE 1/8", 5,000psig, 0.024 Cv					
		VMT1H-2T-3D	0	N/S	2
PROJECT NO.	DWG NO.	REV.	STATUS	SCALE	PAGE

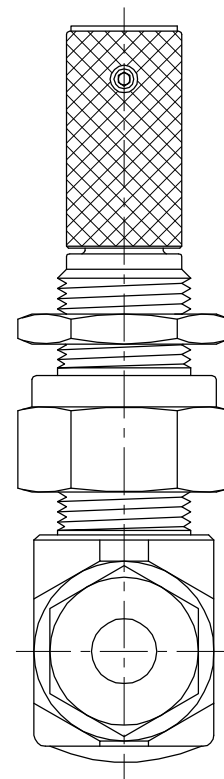
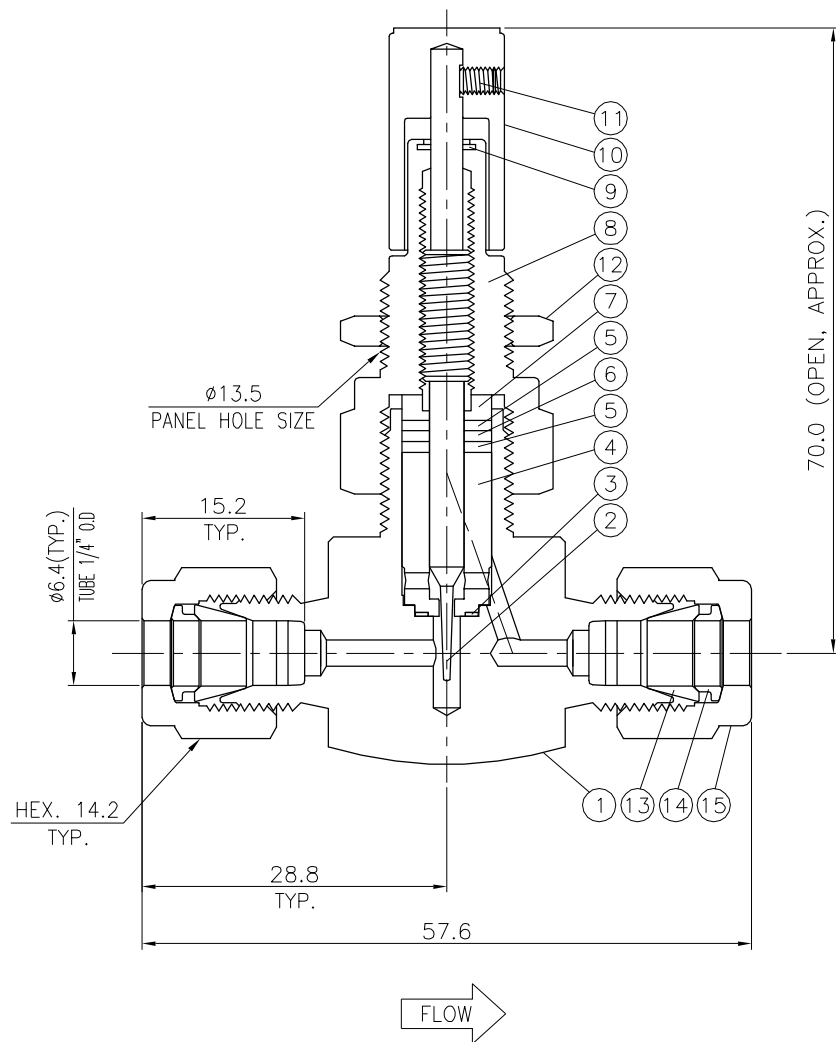


NO.	DESCRIPTION	MATERIAL	REMARKS
1	BODY	316SS	
2	METERING STEM	316SS	
3	ORIFICE SEAL	PTFE	
4	INTEGRATED SEAL	316SS	
5	PACKING	PTFE	
6	LOWER SPACER	316SS	
7	UPPER SPACER	316SS	
8	BONNET	316SS	
9	WASHER	PTFE	
10	HANDLE	316SS	
11	SET SCREW	316SS	
12	LOCKING NUT	316SS	
13	FRONT FERRULE	316SS	
14	BACK FERRULE	316SS	
15	NUT	316SS	

NOTE.

- PART NO. : VMT1H-4T-1D
- MATERIAL : 316SS
- SIZE : 1/4"
- PRESSURE RATING : 5,000psig @ 21°C
- TEMPERATURE RANGE : -54°C ~ 232°C
- ORIFICE SIZE : 1.2mm
- CV FACTOR : 0.010 Cv (1" STEM)
- PANEL THICKNESS : Max. 4mm
- UNIT : mm

0	11.JAN.2018	ISSUED FOR APPROVAL	H.S.JEON	J.K.PARK	W.C.KIM
REV.	DATE	DESCRIPTION	PREPARED BY	REVIEWED BY	APPROVED BY
Hy-Lok HY-LOK CORPORATION					
TITLE METERING VLAVE 1/4", 5,000psig, 0.010 Cv					
		VMT1H-4T-1D	0	N/S	3
PROJECT NO.	DWG NO.	REV.	STATUS	SCALE	PAGE

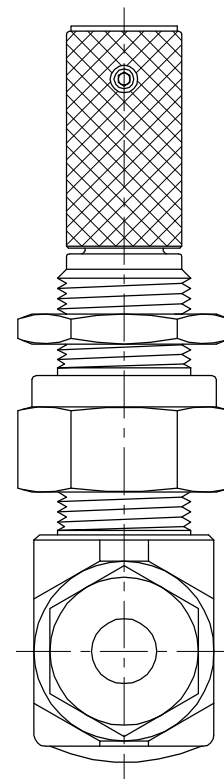
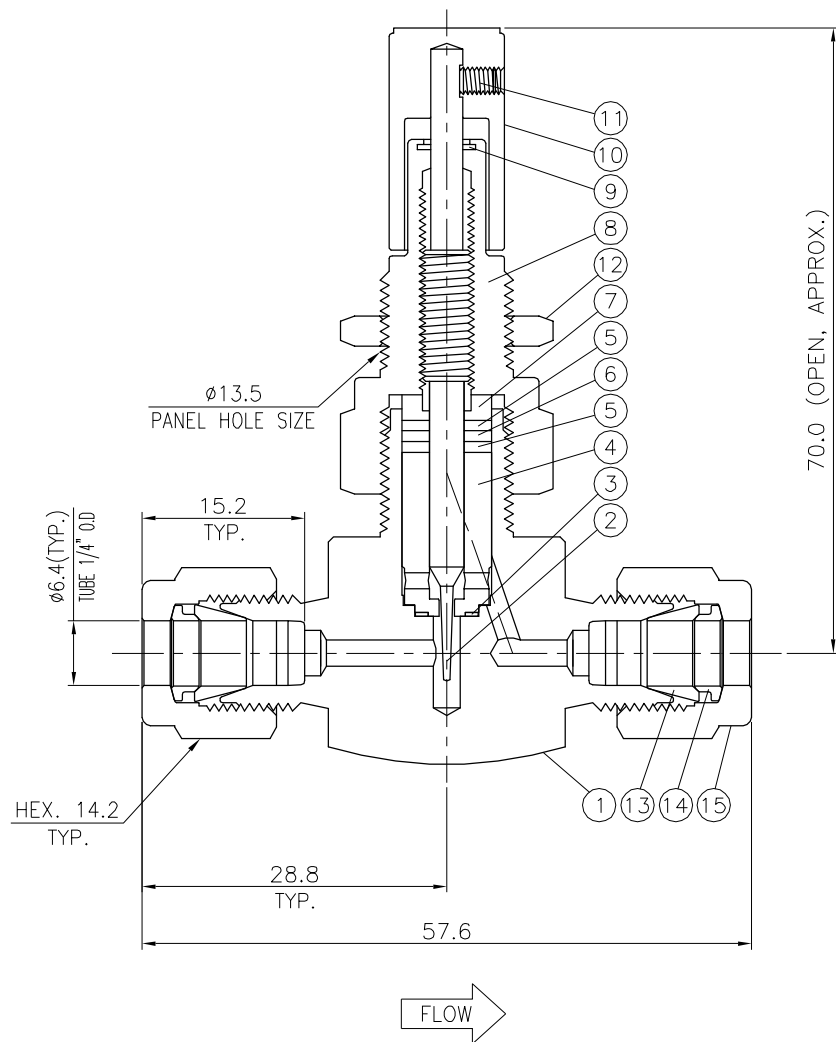


NO.	DESCRIPTION	MATERIAL	REMARKS
1	BODY	316SS	
2	METERING STEM	316SS	
3	ORIFICE SEAL	PTFE	
4	INTEGRATED SEAL	316SS	
5	PACKING	PTFE	
6	LOWER SPACER	316SS	
7	UPPER SPACER	316SS	
8	BONNET	316SS	
9	WASHER	PTFE	
10	HANDLE	316SS	
11	SET SCREW	316SS	
12	LOCKING NUT	316SS	
13	FRONT FERRULE	316SS	
14	BACK FERRULE	316SS	
15	NUT	316SS	

NOTE.

- PART NO. : VMT1H-4T-3D
- MATERIAL : 316SS
- SIZE : 1/4"
- PRESSURE RATING : 5,000psig @ 21°C
- TEMPERATURE RANGE : -54°C ~ 232°C
- ORIFICE SIZE : 1.2mm
- CV FACTOR : 0.024 Cv (1" STEM)
- PANEL THICKNESS : Max. 4mm
- UNIT : mm

0	11.JAN.2018	ISSUED FOR APPROVAL	H.S.JEON	J.K.PARK	W.C.KIM
REV.	DATE	DESCRIPTION	PREPARED BY	REVIEWED BY	APPROVED BY
Hy-Lok HY-LOK CORPORATION					
TITLE METERING VLAVE 1/4", 5,000psig, 0.024 Cv					
		VMT1H-4T-3D	0	N/S	4
PROJECT NO.	DWG NO.	REV.	STATUS	SCALE	CLASS
					PAGE

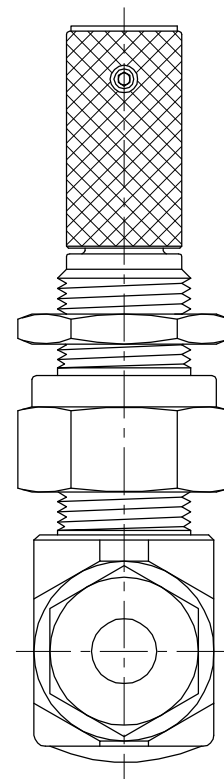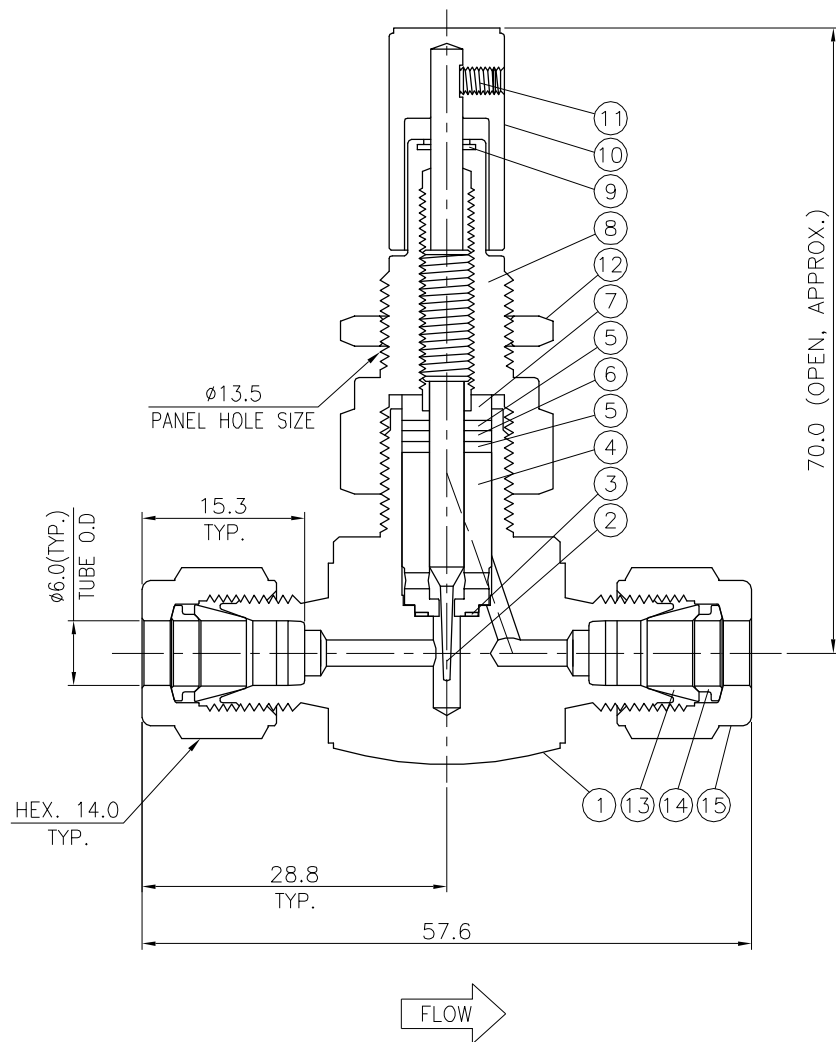


NO.	DESCRIPTION	MATERIAL	REMARKS
1	BODY	316SS	
2	METERING STEM	316SS	
3	ORIFICE SEAL	PTFE	
4	INTEGRATED SEAL	316SS	
5	PACKING	PTFE	
6	LOWER SPACER	316SS	
7	UPPER SPACER	316SS	
8	BONNET	316SS	
9	WASHER	PTFE	
10	HANDLE	316SS	
11	SET SCREW	316SS	
12	LOCKING NUT	316SS	
13	FRONT FERRULE	316SS	
14	BACK FERRULE	316SS	
15	NUT	316SS	

NOTE.

- PART NO. : VMT1H-6M-3D
- MATERIAL : 316SS
- SIZE : 6mm
- PRESSURE RATING : 5,000psig @ 21°C
- TEMPERATURE RANGE : -54°C ~ 232°C
- ORIFICE SIZE : 1.2mm
- CV FACTOR : 0.024 Cv (3" STEM)
- PANEL THICKNESS : Max. 4mm
- UNIT : mm

0	11.JAN.2018	ISSUED FOR APPROVAL	H.S.JEON	J.K.PARK	W.C.KIM
REV.	DATE	DESCRIPTION	PREPARED BY	REVIEWED BY	APPROVED BY
Hy-Lok HY-LOK CORPORATION					
TITLE METERING VLAVE 6mm, 5,000psig, 0.024 Cv					
VMT1H-6M-3D			0	N/S	6
PROJECT NO.	DWG NO.	REV.	STATUS	SCALE	CLASS
PAGE					

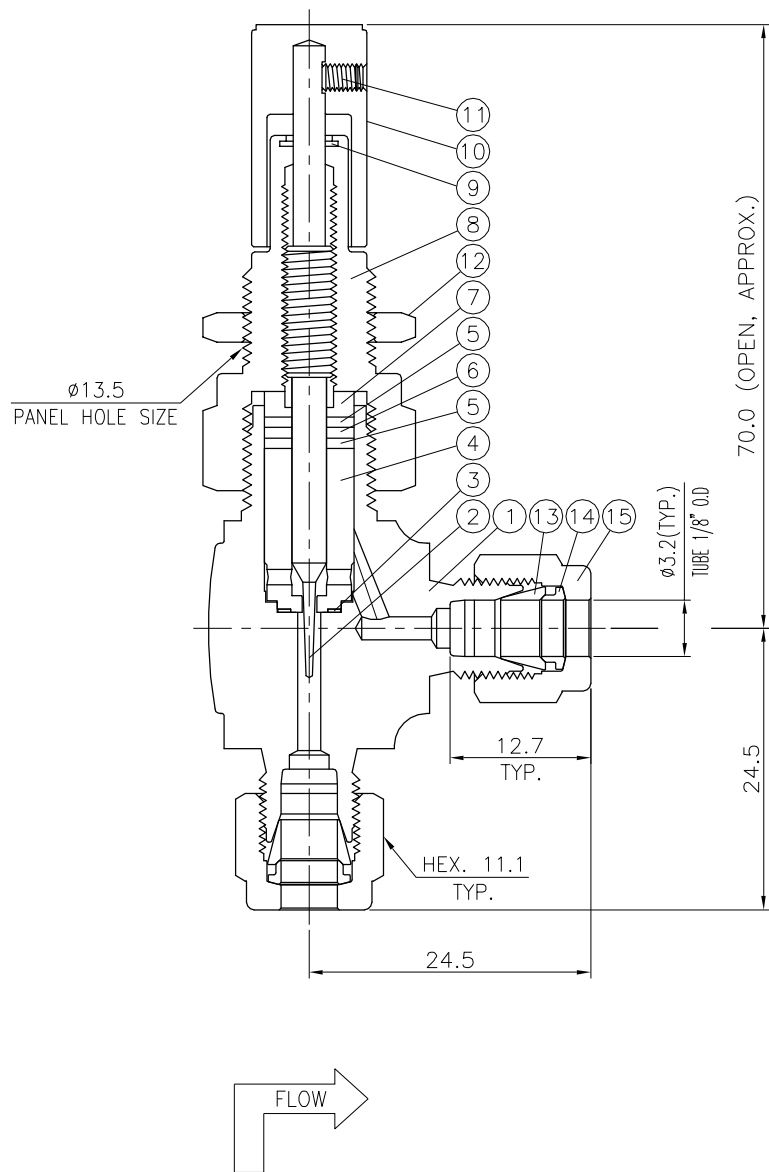


NO.	DESCRIPTION	MATERIAL	REMARKS
1	BODY	316SS	
2	METERING STEM	316SS	
3	ORIFICE SEAL	PTFE	
4	INTEGRATED SEAL	316SS	
5	PACKING	PTFE	
6	LOWER SPACER	316SS	
7	UPPER SPACER	316SS	
8	BONNET	316SS	
9	WASHER	PTFE	
10	HANDLE	316SS	
11	SET SCREW	316SS	
12	LOCKING NUT	316SS	
13	FRONT FERRULE	316SS	
14	BACK FERRULE	316SS	
15	NUT	316SS	

NOTE.

- PART NO. : VMT1HA-2T-1D
- MATERIAL : 316SS
- SIZE : 1/8"
- PRESSURE RATING : 5,000psig @ 21°C
- TEMPERATURE RANGE : -54°C ~ 232°C
- ORIFICE SIZE : 1.2mm
- CV FACTOR : 0.010 Cv (1" STEM)
- PANEL THICKNESS : Max. 4mm
- UNIT : mm

0	11.JAN.2018	ISSUED FOR APPROVAL	H.S.JEON	J.K.PARK	W.C.KIM
REV.	DATE	DESCRIPTION	PREPARED BY	REVIEWED BY	APPROVED BY
Hy-Lok HY-LOK CORPORATION					
TITLE METERING VLAVE 1/8", 5,000psig, 0.010 Cv					
VMT1HA-2T-1D		0		N/S	7
PROJECT NO.	DWG NO.	REV.	STATUS	SCALE	CLASS
					PAGE


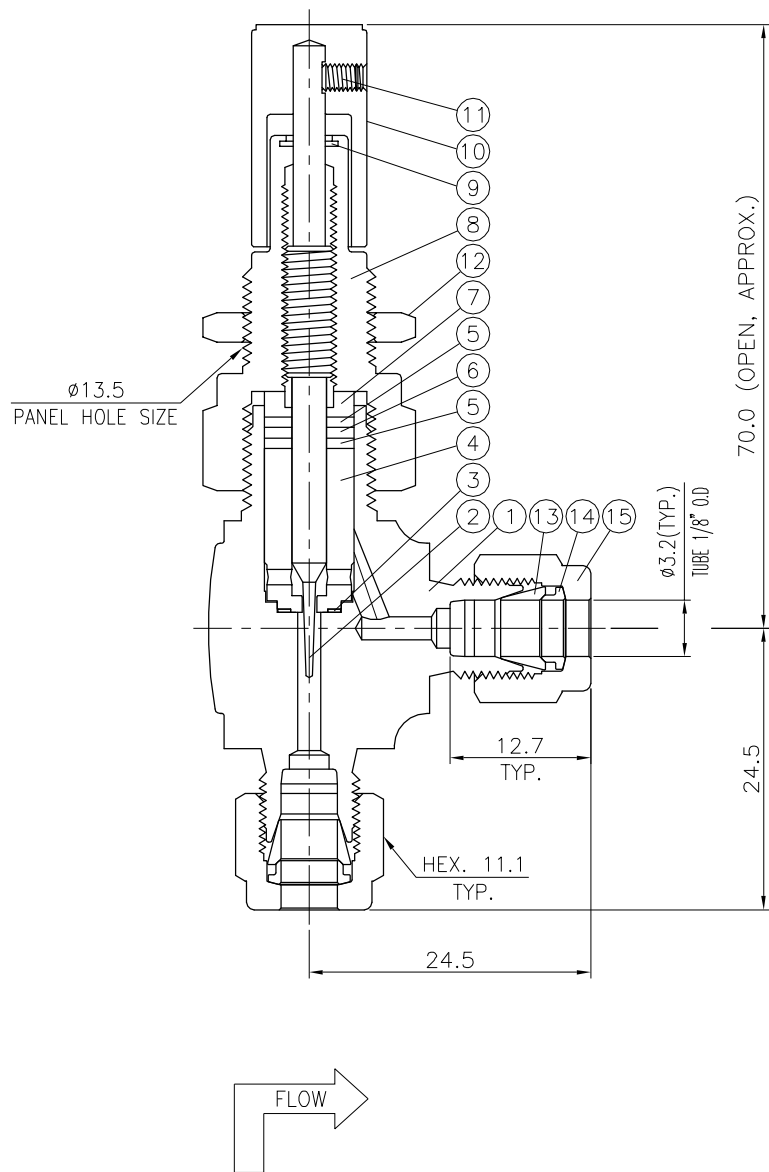


NO.	DESCRIPTION	MATERIAL	REMARKS
1	BODY	316SS	
2	METERING STEM	316SS	
3	ORIFICE SEAL	PTFE	
4	INTEGRATED SEAL	316SS	
5	PACKING	PTFE	
6	LOWER SPACER	316SS	
7	UPPER SPACER	316SS	
8	BONNET	316SS	
9	WASHER	PTFE	
10	HANDLE	316SS	
11	SET SCREW	316SS	
12	LOCKING NUT	316SS	
13	FRONT FERRULE	316SS	
14	BACK FERRULE	316SS	
15	NUT	316SS	

NOTE.

- PART NO. : VMT1HA-2T-3D
- MATERIAL : 316SS
- SIZE : 1/8"
- PRESSURE RATING : 5,000psig @ 21°C
- TEMPERATURE RANGE : -54°C ~ 232°C
- ORIFICE SIZE : 1.2mm
- CV FACTOR : 0.024 Cv (3" STEM)
- PANEL THICKNESS : Max. 4mm
- UNIT : mm

0	11.JAN.2018	ISSUED FOR APPROVAL	H.S.JEON	J.K.PARK	W.C.KIM
REV.	DATE	DESCRIPTION	PREPARED BY	REVIEWED BY	APPROVED BY
Hy-Lok HY-LOK CORPORATION					
TITLE METERING VLAVE 1/8", 5,000psig, 0.024 Cv					
VMT1HA-2T-3D		0		N/S	8
PROJECT NO.	DWG NO.	REV.	STATUS	SCALE	CLASS
					PAGE

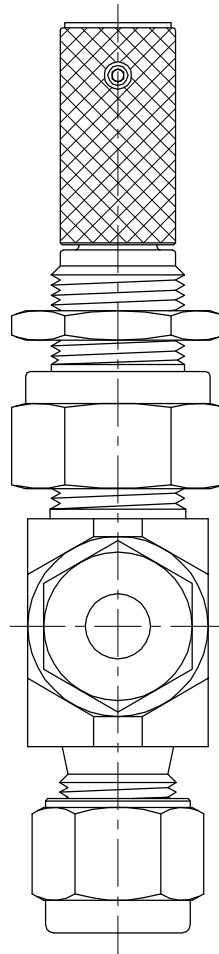
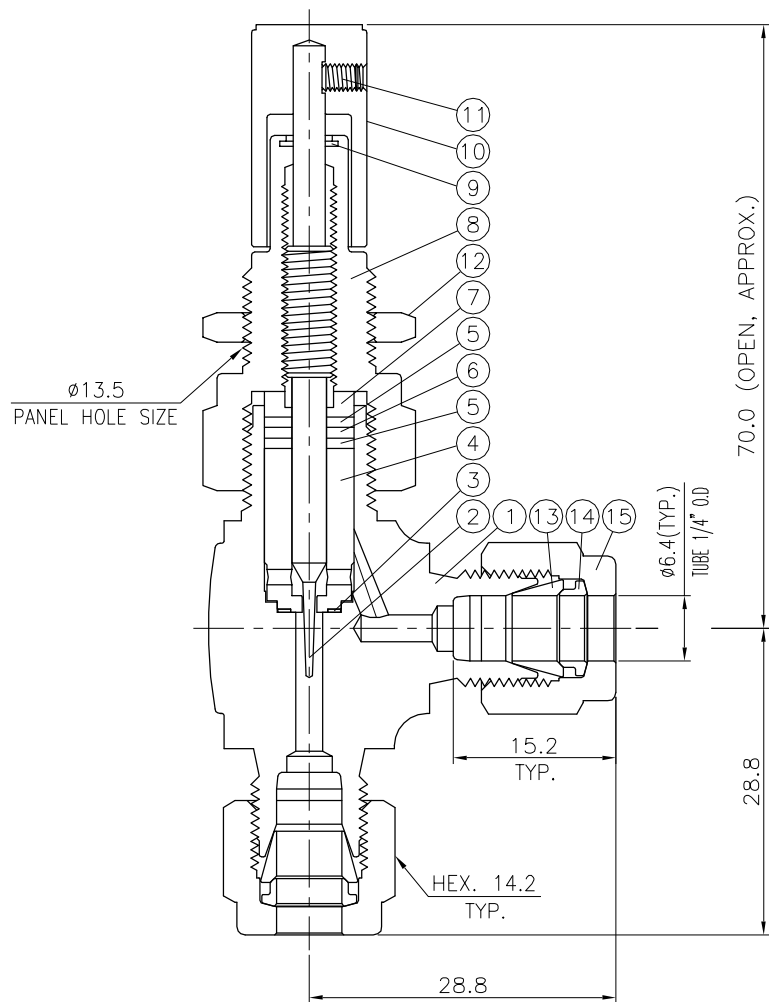


NO.	DESCRIPTION	MATERIAL	REMARKS
1	BODY	316SS	
2	METERING STEM	316SS	
3	ORIFICE SEAL	PTFE	
4	INTEGRATED SEAL	316SS	
5	PACKING	PTFE	
6	LOWER SPACER	316SS	
7	UPPER SPACER	316SS	
8	BONNET	316SS	
9	WASHER	PTFE	
10	HANDLE	316SS	
11	SET SCREW	316SS	
12	LOCKING NUT	316SS	
13	FRONT FERRULE	316SS	
14	BACK FERRULE	316SS	
15	NUT	316SS	

NOTE.

- PART NO. : VMT1HA-4T-1D
- MATERIAL : 316SS
- SIZE : 1/4"
- PRESSURE RATING : 5,000psig @ 21°C
- TEMPERATURE RANGE : -54°C ~ 232°C
- ORIFICE SIZE : 1.2mm
- CV FACTOR : 0.010 Cv (1" STEM)
- PANEL THICKNESS : Max. 4mm
- UNIT : mm

0	11.JAN.2018	ISSUED FOR APPROVAL	H.S.JEON	J.K.PARK	W.C.KIM
REV.	DATE	DESCRIPTION	PREPARED BY	REVIEWED BY	APPROVED BY
Hy-Lok HY-LOK CORPORATION					
TITLE METERING VLAVE 1/4", 5,000psig, 0.010 Cv					
VMT1HA-4T-1D		0		N/S	9
PROJECT NO.	DWG NO.	REV.	STATUS	SCALE	CLASS
					PAGE

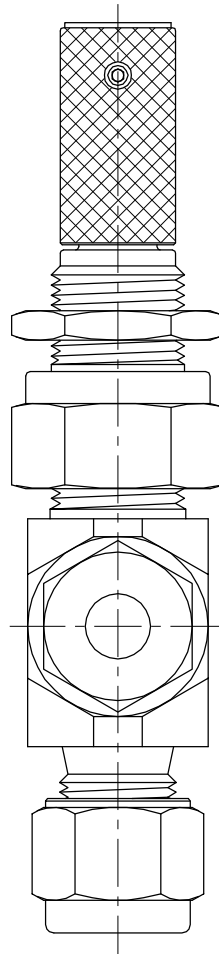
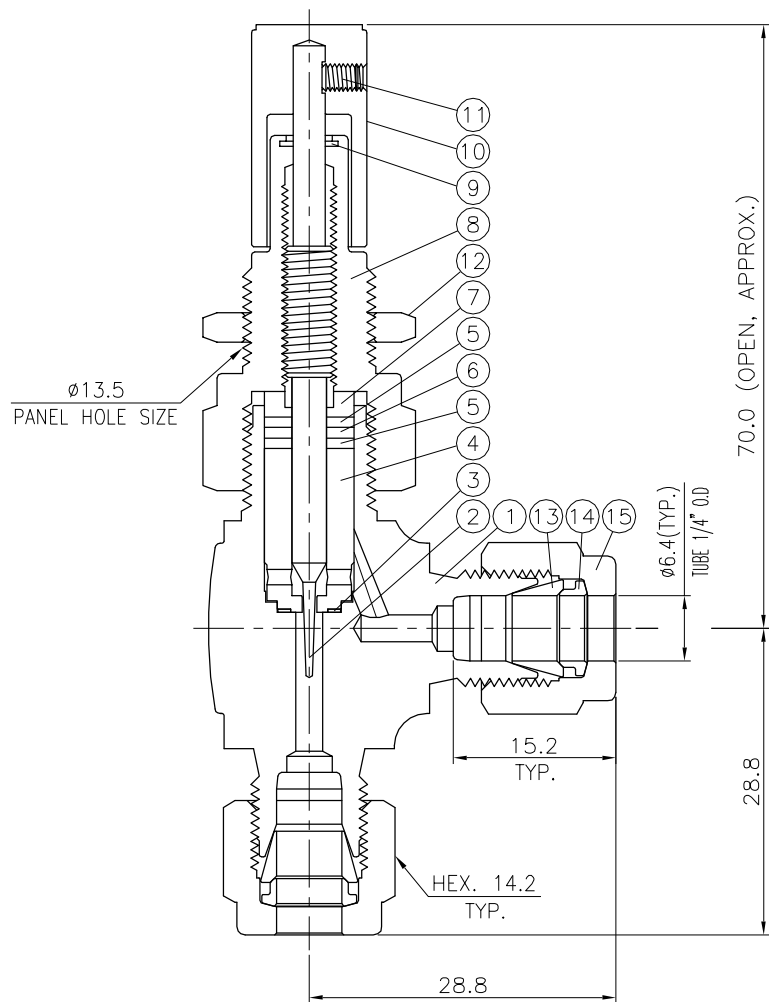


NO.	DESCRIPTION	MATERIAL	REMARKS
1	BODY	316SS	
2	METERING STEM	316SS	
3	ORIFICE SEAL	PTFE	
4	INTEGRATED SEAL	316SS	
5	PACKING	PTFE	
6	LOWER SPACER	316SS	
7	UPPER SPACER	316SS	
8	BONNET	316SS	
9	WASHER	PTFE	
10	HANDLE	316SS	
11	SET SCREW	316SS	
12	LOCKING NUT	316SS	
13	FRONT FERRULE	316SS	
14	BACK FERRULE	316SS	
15	NUT	316SS	

NOTE.

- PART NO. : VMT1HA-4T-3D
- MATERIAL : 316SS
- SIZE : 1/4"
- PRESSURE RATING : 5,000psig @ 21°C
- TEMPERATURE RANGE : -54°C ~ 232°C
- ORIFICE SIZE : 1.2mm
- CV FACTOR : 0.024 Cv (3" STEM)
- PANEL THICKNESS : Max. 4mm
- UNIT : mm

0	11.JAN.2018	ISSUED FOR APPROVAL	H.S.JEON	J.K.PARK	W.C.KIM
REV.	DATE	DESCRIPTION	PREPARED BY	REVIEWED BY	APPROVED BY
Hy-Lok HY-LOK CORPORATION					
TITLE METERING VLAVE 1/4", 5,000psig, 0.024 Cv					
VMT1HA-4T-3D		0		N/S	10
PROJECT NO.	DWG NO.	REV.	STATUS	SCALE	CLASS
					PAGE


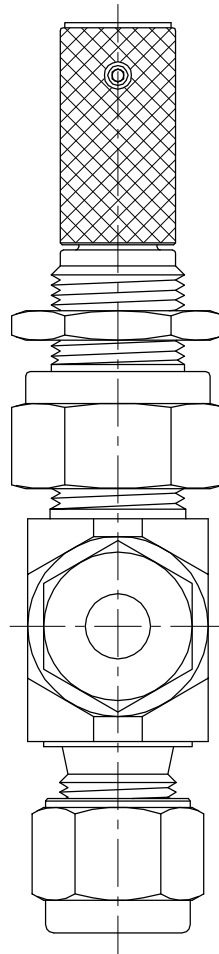
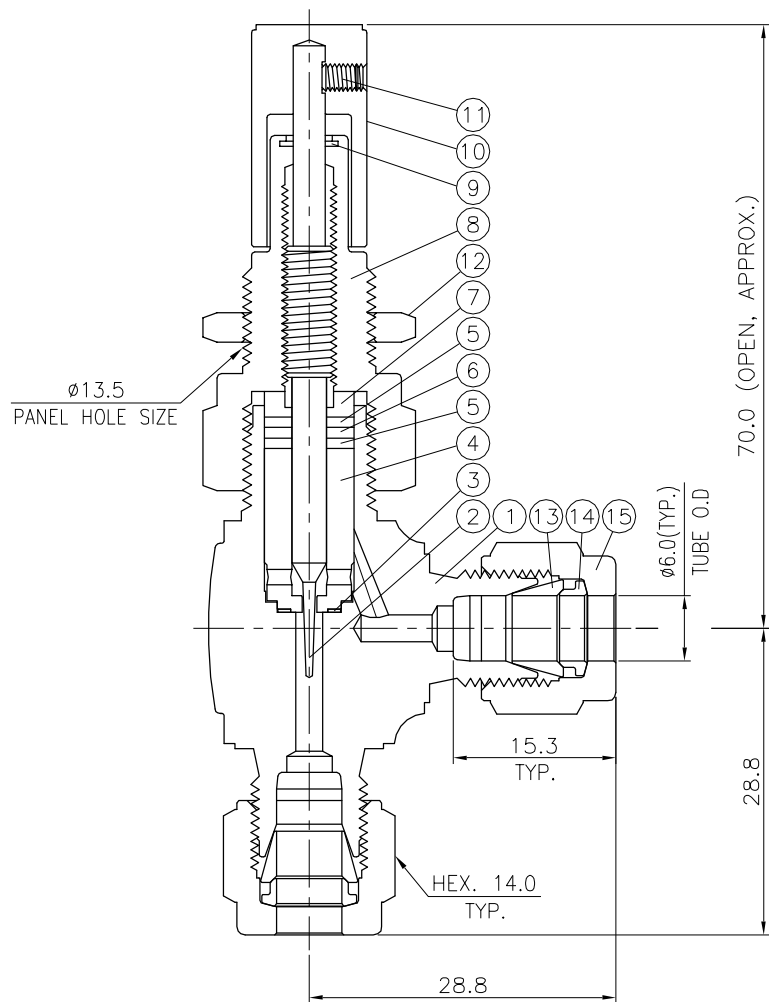


NO.	DESCRIPTION	MATERIAL	REMARKS
1	BODY	316SS	
2	METERING STEM	316SS	
3	ORIFICE SEAL	PTFE	
4	INTEGRATED SEAL	316SS	
5	PACKING	PTFE	
6	LOWER SPACER	316SS	
7	UPPER SPACER	316SS	
8	BONNET	316SS	
9	WASHER	PTFE	
10	HANDLE	316SS	
11	SET SCREW	316SS	
12	LOCKING NUT	316SS	
13	FRONT FERRULE	316SS	
14	BACK FERRULE	316SS	
15	NUT	316SS	

NOTE.

- PART NO. : VMT1HA-6M-1D
- MATERIAL : 316SS
- SIZE : 6mm
- PRESSURE RATING : 5,000psig @ 21°C
- TEMPERATURE RANGE : -54°C ~ 232°C
- ORIFICE SIZE : 1.2mm
- CV FACTOR : 0.010 Cv (1" STEM)
- PANEL THICKNESS : Max. 4mm
- UNIT : mm

0	11.JAN.2018	ISSUED FOR APPROVAL	H.S.JEON	J.K.PARK	W.C.KIM
REV.	DATE	DESCRIPTION	PREPARED BY	REVIEWED BY	APPROVED BY
Hy-Lok HY-LOK CORPORATION					
TITLE METERING VLAVE 6mm, 5,000psig, 0.010 Cv					
VMT1HA-6M-1D		0		N/S	11
PROJECT NO.	DWG NO.	REV.	STATUS	SCALE	CLASS
					PAGE

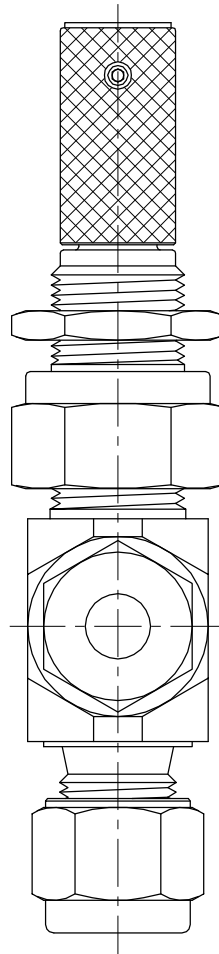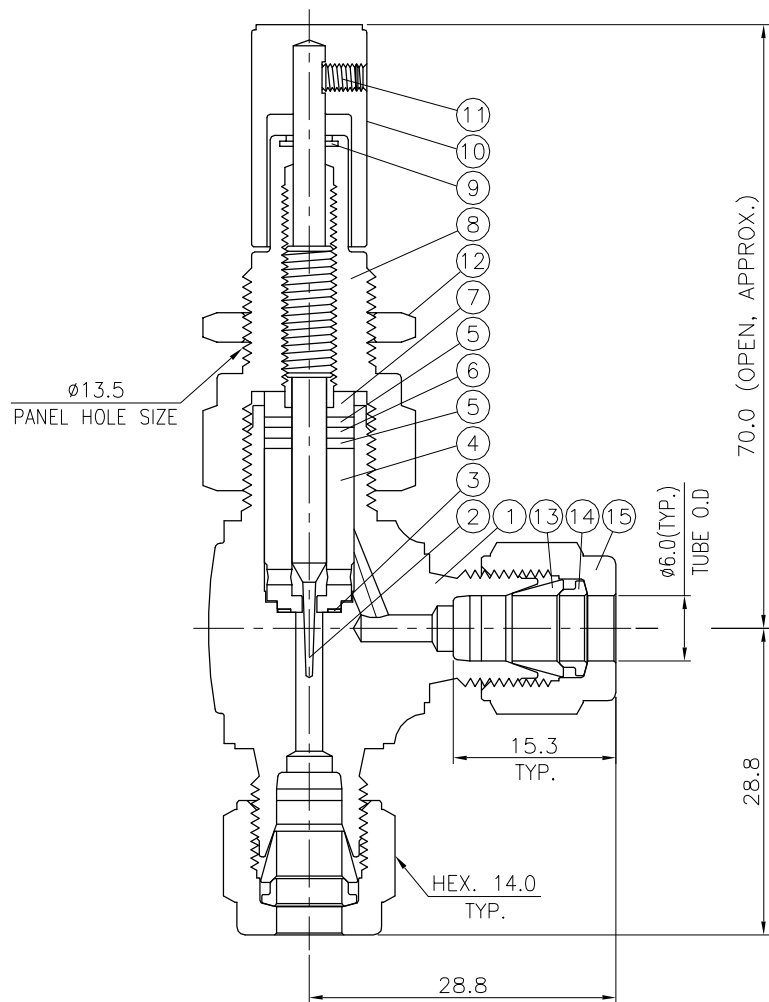

NO.	DESCRIPTION	MATERIAL	REMARKS
1	BODY	316SS	
2	METERING STEM	316SS	
3	ORIFICE SEAL	PTFE	
4	INTEGRATED SEAL	316SS	
5	PACKING	PTFE	
6	LOWER SPACER	316SS	
7	UPPER SPACER	316SS	
8	BONNET	316SS	
9	WASHER	PTFE	
10	HANDLE	316SS	
11	SET SCREW	316SS	
12	LOCKING NUT	316SS	
13	FRONT FERRULE	316SS	
14	BACK FERRULE	316SS	
15	NUT	316SS	

NOTE.

- PART NO. : VMT1HA-6M-3D
- MATERIAL : 316SS
- SIZE : 6mm
- PRESSURE RATING : 5,000psig @ 21°C
- TEMPERATURE RANGE : -54°C ~ 232°C
- ORIFICE SIZE : 1.2mm
- CV FACTOR : 0.024 Cv (3" STEM)
- PANEL THICKNESS : Max. 4mm
- UNIT : mm

0	11.JAN.2018	ISSUED FOR APPROVAL	H.S.JEON	J.K.PARK	W.C.KIM
REV.	DATE	DESCRIPTION	PREPARED BY	REVIEWED BY	APPROVED BY
Hy-Lok HY-LOK CORPORATION					
TITLE METERING VLAVE 6mm, 5,000psig, 0.024 Cv					
VMT1HA-6M-3D		0		N/S	12
PROJECT NO.	DWG NO.	REV.	STATUS	SCALE	CLASS
					PAGE

По вопросам продаж и поддержки обращайтесь:

Астрахань +7 (851) 299-46-80
Барнаул +7 (385) 237-96-76
Белгород +7 (472) 220-58-80
Владимир +7 (492) 249-51-33
Волгоград +7 (844) 245-94-42
Екатеринбург +7 (343) 302-14-75
Ижевск +7 (341) 220-90-75
Казань +7 (843) 207-19-05
Калининград +7 (401) 272-21-36
Кемерово +7 (384) 221-56-70
Киров +7 (833) 220-58-70
Краснодар +7 (861) 238-86-59
Красноярск +7 (391) 989-82-67

Курск +7 (471) 223-80-45
Липецк +7 (474) 220-01-75
Москва +7 (499) 404-24-72
Набережные Челны +7 (855) 291-01-32
Нижний Новгород +7 (831) 200-34-65
Новосибирск +7 (383) 235-95-48
Омск +7 (381) 299-16-70
Оренбург +7 (353) 248-64-35
Пермь +7 (342) 233-81-65
Ростов-на-Дону +7 (863) 309-14-65
Рязань +7 (491) 277-61-95
Самара +7 (846) 219-28-25
Санкт-Петербург +7 (812) 660-57-09

Саратов +7 (845) 239-86-35
Смоленск +7 (481) 251-55-32
Ставрополь +7 (865) 257-76-63
Сургут +7 (346) 277-96-35
Тверь +7 (482) 239-50-56
Тула +7 (487) 244-05-30
Тюмень +7 (345) 256-94-75
Ульяновск +7 (842) 242-51-95
Уфа +7 (347) 258-82-65
Хабаровск +7 (421) 292-95-69
Чебоксары +7 (835) 228-50-89
Челябинск +7 (351) 277-89-65
Ярославль +7 (485) 267-02-35

сайт: hylok.pro-solution.ru | эл. почта: hky@pro-solution.ru

телефон: 8 800 511 88 70

Россия и другие страны ТС доставка в любой город